

DiamondAir 22.3 SEER2 24K BTU Wall Mount Mini Split

Set Model

Indoor unit model DF2024HMSI2
 Outdoor unit model D2024SHO2

Certified



SYSTEM PERFORMANCE DATA

Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity(Outdoor)	(A)	25.0
Max.fuse(Outdoor)	(A)	35.0
Connection wiring		14AWG*4
Cooling		
Capacity	(Btu/h)	23000(4650~26600)
Power Input	(W)	1840(484~2540)
Current	(A)	8.25(2.1~11)
SEER2	(Btu/W)	22.3
EER2	(Btu/W)	12.5
Heating		
Capacity	(Btu/h)	26000(9550~27000)
Power Input	(W)	2540(810~3090)
Current	(A)	11.38(3.5~13.4)
HSPF2-4	(Btu/W)	10.3
HSPF2-5	(Btu/W)	7.7
COP	W/W	3.00
Heat at 17F(H32)	(Btu/h)	18900
Heat at 5F(H42)	(Btu/h)	23000
COP at 5F(H42)	W/W	1.80

REFRIGERANT PIPE DATA

Throttle type	Indoor unit	N/A
	Outdoor unit	EXV+Throttle valve
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	91.71
	(ft)	25.0
Refrigerant precharge	(m)	7.5
Additional charge for each ft	(oz/ft)	0.32
Additional charge for each m	(g/m)	30.0
Liquid side/ Gas side(indoor)	(inch)	3/8"/5/8"
	(mm)	9.52/15.9
Liquid side/ Gas side(outdoor)	(inch)	3/8"/5/8"
	(mm)	9.52/15.9
Max. pipe length	(ft)	164.0
	(m)	50.0
Max. difference in level	(ft)	82.0
	(m)	25.0
Connection method		Flared
Indoor(cooling)	(Deg. °F)	60~90
	(Deg. °C)	16~32
Indoor(heating)	(Deg. °F)	32~86
	(Deg. °C)	0~30
Outdoor(cooling)	(Deg. °F)	-22~122
	(Deg. °C)	-30~50
Outdoor(heating)	(Deg. °F)	-22~75
	(Deg. °C)	-30~24


INDOOR UNIT DATA

Indoor fan motor		
Model		ZKFP-58-8-15
Qty		1
Input	(W)	58.00
Output	(W)	58.0
RLA	(A)	0.4
Speed(Hi/Mi/Lo)	(r/min)	1200/1080/600
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	760.59/601.18/458.82/382.35
Indoor noise level (Hi/Med/Lo)	[dB(A)]	46.5/44/35
Dehumidification		
	(L/H)	2.43
Indoor unit		
Dimension (WxDxH)	(inch)	42.60x9.21x13.27
	(mm)	1082x234x337
Packing(WxDxH)	(inch)	45.47x16.34x12.40
	(mm)	1155x415x315
Net/Gross weight	(lbs.)	29.98/38.14
	(kg)	13.6/17.3

OUTDOOR UNIT DATA

Compressor		
Type		Twin-ROTARY
Model		KTM240D43UKT
Brand		GMCC
Capacity	(Btu/h)	25931
Input	(W)	2045
Rated current (RLA)	(A)	17.1
Refrigerant oil/oil charge	(ml)	ESTER OIL VG74 620
Outdoor fan motor		
Model		ZKFN-120-8-2
Qty		1
Input	(W)	150.0
Output	(W)	120
RLA	(A)	0.5
Speed	(r/min)	950/800/500
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	2235
Outdoor noise level	[dB(A)]	62.5
Outdoor unit		
Dimension (WxDxH)	(inch)	37.24x16.14x31.89
	(mm)	946x410x810
Packing (WxDxH)	(inch)	42.91x19.69x34.84
	(mm)	1090x500x885
Net/ Gross weight	(lbs.)	134.48/144.40
	(kg)	61/65.5

Indoor unit dimension

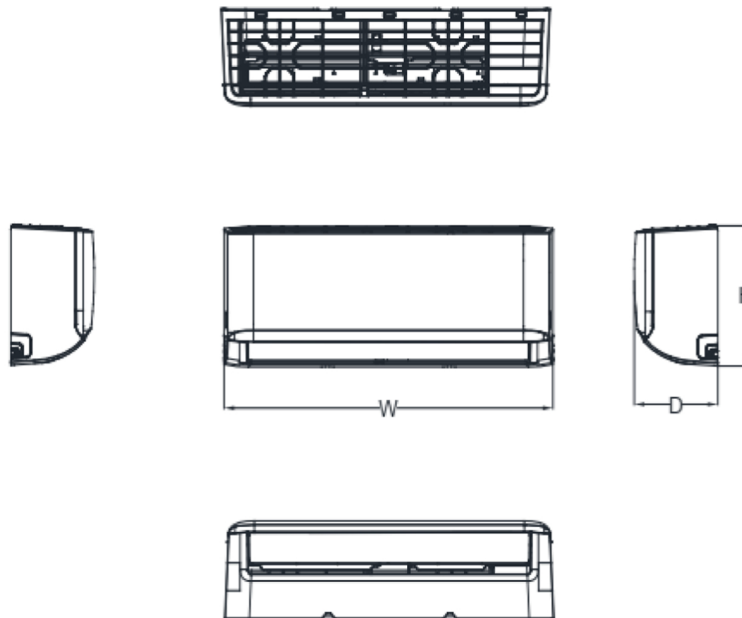

Capacity	Body Code	W(mm/inch)	D(mm/inch)	H(mm/inch)
6K~11K	A	729/28.7	200/7.87	292/11.5
8K~14K	B	802/31.57	200/7.87	295/11.61
12K~21K	C	971/38.23	228/8.98	321/12.64
18K~28K	D	1082/42.6	234/9.21	337/13.27
27K~36K	F	1259/49.57	283/11.14	362/14.25

Outdoor unit dimension

